


- NOTES:**
1. **PLUGS SHALL BE INSTALLED ON ALL CONNECTIONS TO EXISTING SEWER AND SHALL NOT BE REMOVED UNTIL THE MAIN HAS BEEN ACCEPTED BY THE TOWN**
  2. **PLUG SHALL BE INSTALLED ON THE DOWNSTREAM OUTLET.**
  3. **PLUG ASSEMBLY SHALL BE TAGGED WITH CONTRACTOR'S NAME & CONTACT NUMBER ON A CORROSION-RESISTANT PLATE.**
  4. **PLUGGED MANHOLE SHALL BE MAINTAINED CONTINUALLY TO ALLOW ACCESS TO THE PLUG.**

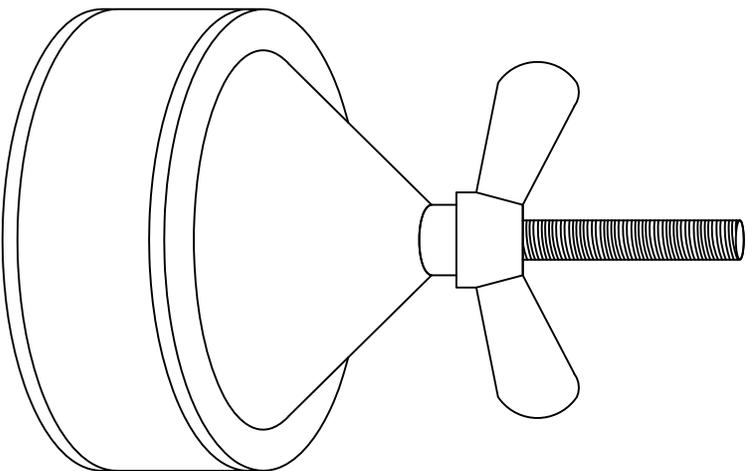

WING NUT PLUG