




STAINLESS STEEL CABLE




CORROSION RESISTANT FASTENERS



WING NUT PLUG

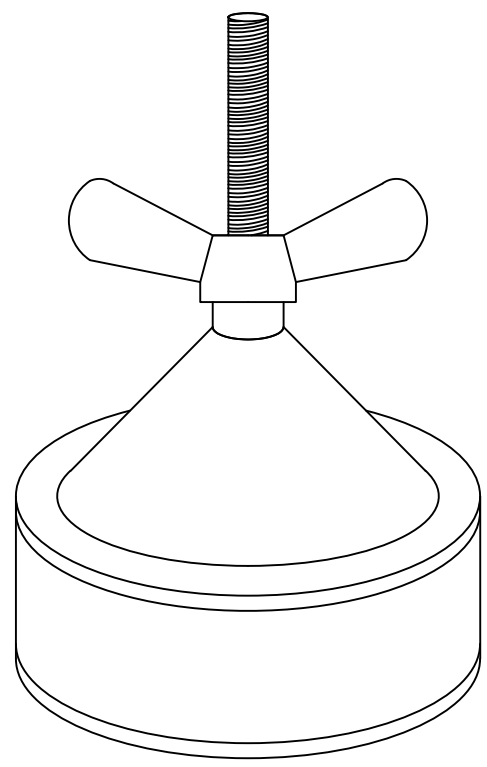

IDENTIFICATION TAG

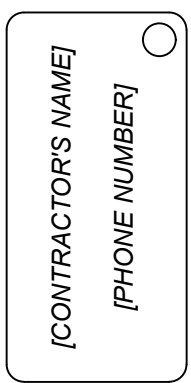

NOTES:

1. PLUGS SHALL BE INSTALLED ON ALL CONNECTIONS TO EXISTING SEWER AND SHALL NOT BE REMOVED UNTIL THE MAIN HAS BEEN ACCEPTED BY THE TOWN
2. PLUG SHALL BE INSTALLED ON THE DOWNSTREAM OUTLET.
3. PLUG SHALL BE SECURED TO A MINIMUM OF 2 MANHOLE STEPS BY STAINLESS STEEL CABLE WITH CORROSION-RESISTANT FASTENERS.
4. PLUG ASSEMBLY SHALL BE TAGGED WITH CONTRACTOR'S NAME & CONTACT NUMBER ON A CORROSION-RESISTANT PLATE.
5. PLUGGED MANHOLE SHALL BE MAINTAINED CONTINUALLY TO ALLOW ACCESS TO THE PLUG.

NOT TO SCALE
DATE: OCTOBER 2020