
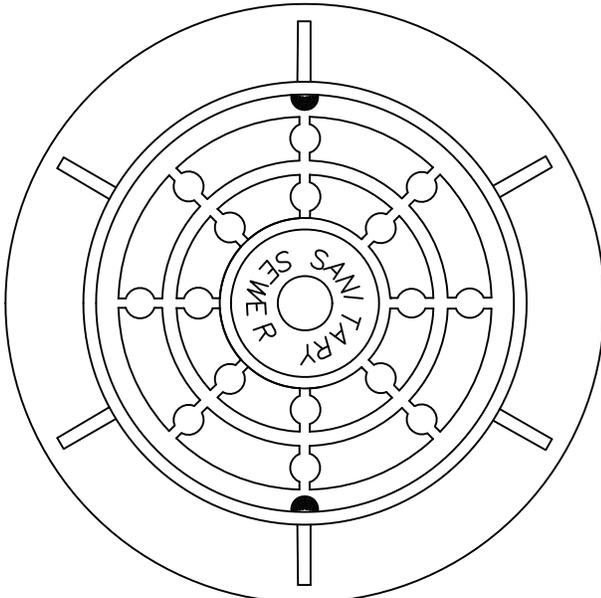


NOTES:


1) FOR MANHOLES NOT SURROUNDED BY PAVEMENT, ATTACH FRAME TO TOP OF CONE SECTION USING $\frac{5}{8}$ " X 4" WEDGE ANCHOR BOLTS, MINIMUM OF TWO W/ CONSEAL.

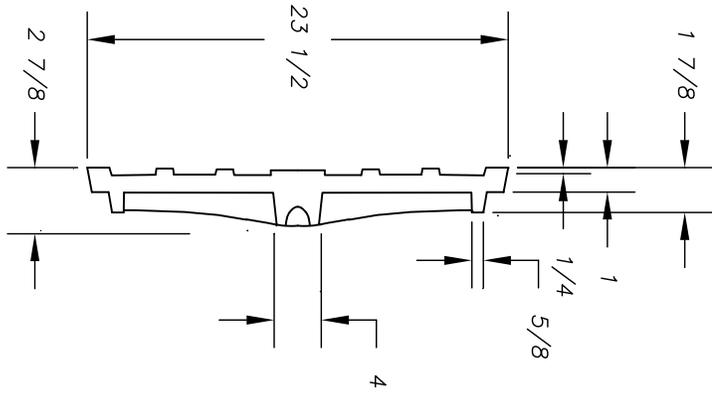

SANITARY SEWER
STORM SEWER

LABEL TO CORRESPOND TO USE.

MINIMUM WEIGHT:
COVER 120 lbs. MINIMUM
FRAME 190 lbs. MINIMUM

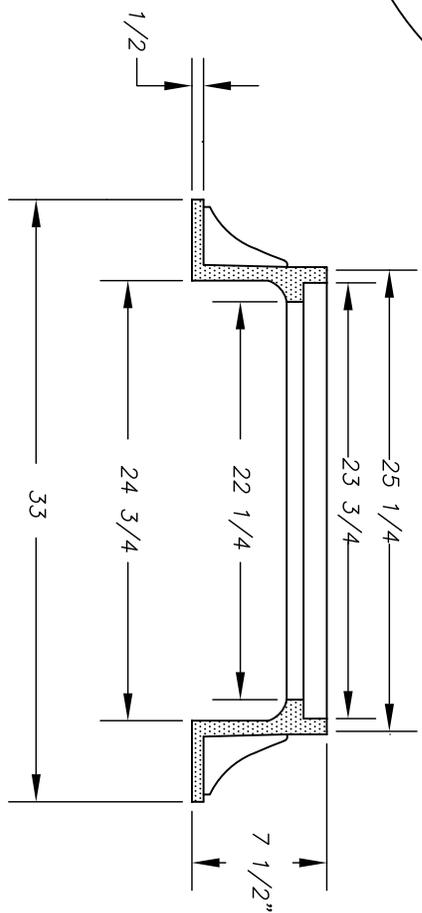

NOT TO SCALE
DATE: AUGUST 2024

MEASUREMENTS IN INCHES

S4

MANHOLE RING AND COVER

TOWN OF SOUTHERN PINES