


**NOTES:**

1. THE SEWER LINE ENTERING A DROP MANHOLE SHALL BE CONTINUOUS MATERIAL FROM THE UPSTREAM MANHOLE.
2. ONE INSIDE DROP PERMITTED WITHIN A 5'Ø MANHOLE. TWO INSIDE DROPS PERMITTED WITHIN A 6'Ø MANHOLE.
3. A DROP MANHOLE IS REQUIRED WHEN THE DIFFERENCE BETWEEN INVERTS EXCEEDS 20".
4. INSIDE DROP PIPE DIAMETER SHALL BE THE SAME AS THE INFLOW SEWER LINE DIAMETER.
5. STAINLESS STEEL STRAPPING SHALL BE 1" WIDE BY 1/8" THICK AND ATTACHED TO THE MANHOLE WALL WITH MASONRY ANCHORS.

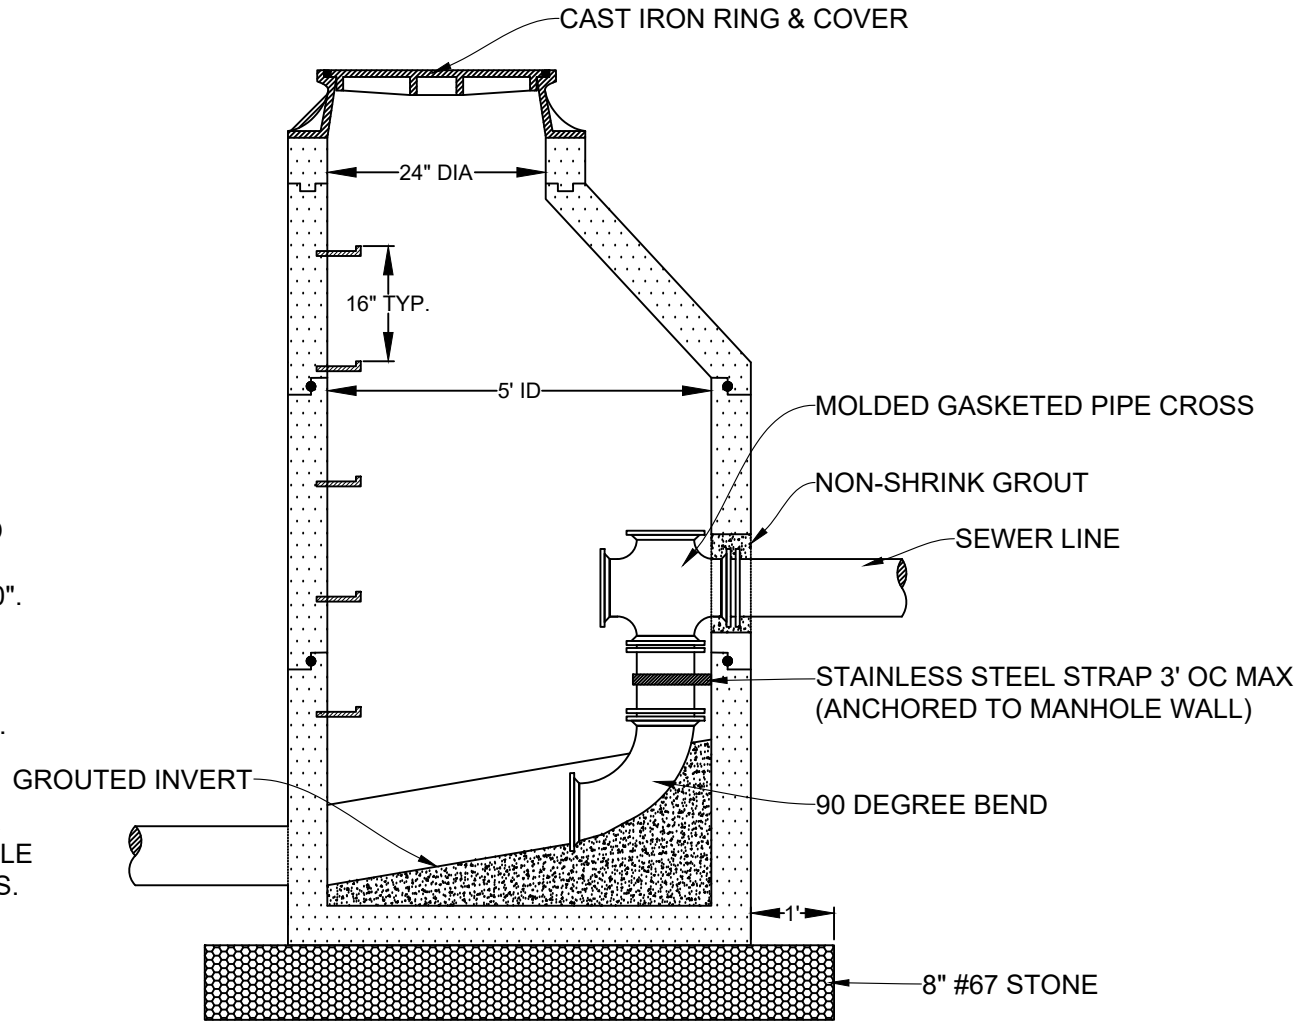

ELEVATION